No-Ha Collection

Installation pictures



No-Ha 2.0 mini

Nm 938 & Nm 937 Cartel /Locco



Standard tool

Depth: 130.5 mm

Width: 20 mm


130.5 mm 190 150 20 22

Standard tool

Ø8 mm








- Special tool
- Ø 44 mm
- Code: Z44














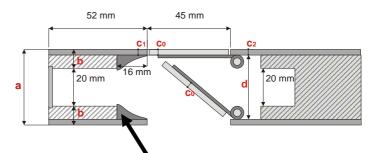

Insert 2 black plastic pieces and fixed them strongly with the white adhesive tape in kit...







5 Prepare the lock: Glue the black sticker to the bottom in the showed way.





- No function
- Only aesthetical when you look inside the door.

6 Insert the lock in the door and fix the lock in the front with 2 screws. Test the lock








After testing the lock install the finished coverplates.


















2







Striking plate: adjustable position by using the 2 screws

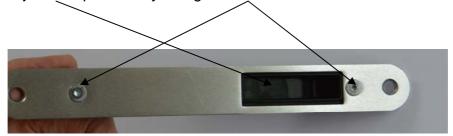


No-Ha 2.0 Slide NS 200 & NS 205 & NS 210

 Start with an opening of 45mm x 87mm with a cutter (diameter 8mm).

 Use than a cutter (diameter 44mm-special size) to make the opening inside the door <u>as mentioned</u> <u>in the instructions</u>.(see red line)



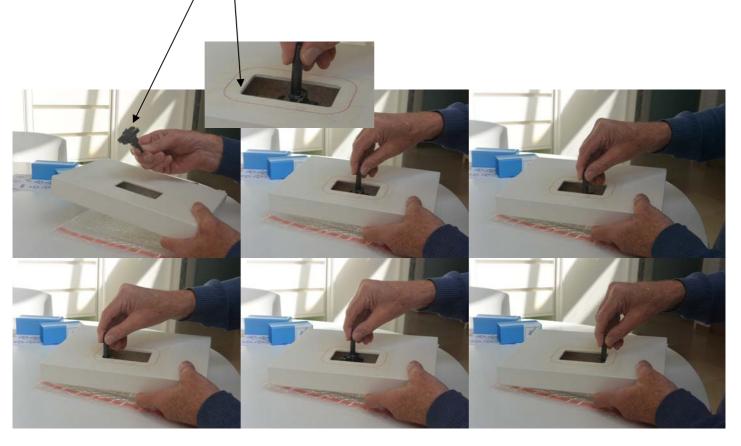


• The coverplates,:- the finishing layer must be fixed with glue to the aluminium springtables





 Proceed with entering all the pieces inside the door as demonstrated.
Please follow the instructions.



For the NS 205 (1) and NS 210 you need the white piece between the 2 black pieces

